


Features

- 19" New Generation Stainless Steel Panel PC
- Intel Celeron N2930 1.83GHz Onboard Processor
- True Flat Front Bezel Design and Grade 304 Stainless Steel Enclosure (Grade 316 for Option)
- IP66/IP69K Rated with M12 Connectors
- Support Resistive Touch, Projected Capacitive Touch, and Glass
- Touch on/off Button on the Side Edge for Hygienic Cleaning
- Support Ergonomic Versatile Mounting: Yoke Mounting / Space-saving VESA 100 x 100 mm Mounting

Specifications

| System | | |
|--------------------------------|--|--------------------------|
| CPU | Celeron N2930 Processor(2M Cache,1.83GHz) | |
| System Chipset | SoC | |
| Memory | Onboard 4GB DDR3L SDRAM , up to 8GB(option) | |
| IO Port | | |
| USB | 1 x M12 8-pin for USB 2.0 with waterproof cover and chain | |
| Serial / Parallel | 1 x M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain | |
| LAN | 1 x M12 8-pin for LAN with waterproof cover and chain | |
| Audio | 1 x Touch on/off button on the side | |
| Power Connector | 1 x M12 3-pin for DC power with waterproof cover and chain 1 x Power switch on the side | |
| Option | 2 x optional blank M12 connector with waterproof cover and chain for selecting two from the following options: 2 x USB 2.0 1 x USB 3.0 1 x LAN (POE for option) 1 x COM 1 x CAN | |
| Storage Space | | |
| HDD | 1 x 2.5" SATA3 HDD | |
| Expansion | | |
| Expansion Slot | 1 x miniPCIe slot for WIFI/BT(optional), 4G/LTE(optional) | |
| RFID module | RFID module design on the front side(optional) | |
| Display | | |
| | Standard | High Brightness Optional |
| Display Type | 19" TFT-LCD | 19" TFT-LCD |
| Max. Resolution | 1280 x 1024 | 1280 x 1024 |
| Max. Color | 16.7M | 16.7M |
| Luminance (cd/m ²) | 350 | 1000 |
| View Angle | 170(H) /165(V) | 170(H) /160(V) |
| Contrast | 1000:1 | 1000:1 |
| Backlight Lifetime | 50,000 hrs | 30,000 hrs |
| Touch Screen | | |
| Type | Resistive Touch (For R model) Projected Capacitive Touch (For P model) Glass (For G model) | |
| Interface | USB | |
| Light Transmission(%) | Resistive Touch : 80% Projected Capacitive : 90% | |
| Power | | |
| Power Input | DC 9~36V | |
| Power Consumption | ViTAM-819P:30W | |

Dimensions

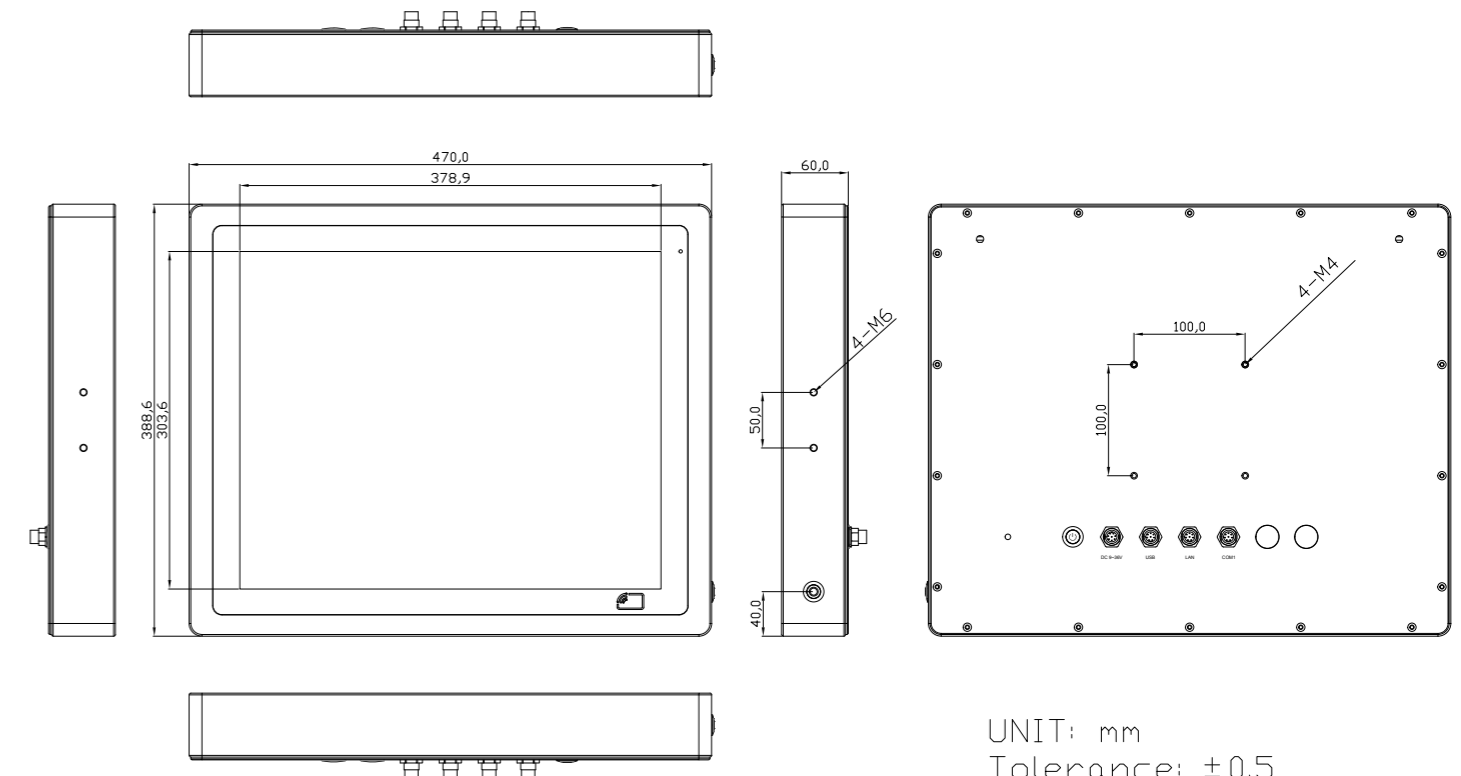

| Mechanical | |
|--|---|
| Construction | 304 Stainless steel chassis(default), 316 Stainless steel chassis(optional) |
| Mounting | VESA mount 100 x 100, Yoke mount for optional |
| IP Rating | Total IP66/IP69K |
| Dimensions | 470 x 388 x 60 mm |
| Net Weight | 9.5 kg |
| Environmental | |
| Operating Temperature | 0~50°C |
| Storage Temperature | -30~70°C |
| Storage Humidity | 10 to 90% @ 40°C, non- condensing |
| Certificate | CE/FCC Class A |
| Operating System Support | |
| WEC 7, Windows Embedded 7, Windows Embedded 8.1, Windows 10 IoT ENT LTSC | |
| Ordering Information | |
| ViTAM-819P | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, projected capacitive touch, 9~36V DC power input with Adapter |
| ViTAM-819R | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, 5 wire resistive touch window, 9~36V DC power input with Adapter |
| ViTAM-819G | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, protection glass, 9~36V DC power input with Adapter |
| ViTAM-819PH | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, projected capacitive touch, 9~36V DC power input with Adapter, 1,000 nits LCD |
| ViTAM-819RH | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, 5 wire resistive touch window, 9~36V DC power input with Adapter, 1,000 nits LCD |
| ViTAM-819GH | 19" SXGA IP66/IP69K stainless steel panel pc, Celeron N2930 Processor, 4GB DDR3L RAM, 32G MLC SSD, protection glass,9~36V DC power input with Adapter, 1,000 nits LCD |